


440.SR - KLUCZE OCZKOWO-PŁASKIE METRYCZNE ADF

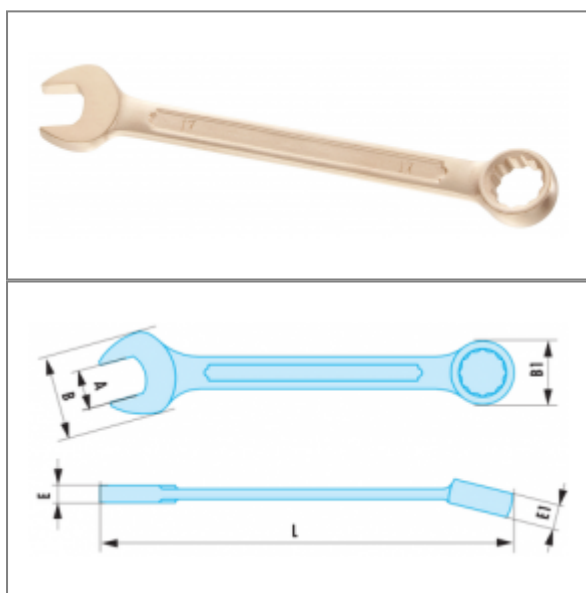


Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	A [mm]	B [mm]	B1 [mm]	E [mm]	E1 [mm]	L [mm]	[g]
440.6SR	6	14,0	11,6	4,4	6	105	20
440.7SR	7	17,5	14,5	5,0	7	120	25
440.8SR	8	17,5	14,5	5,0	7	120	35
440.9SR	9	22,0	18,0	5,4	8	135	40
440.10SR	10	22,0	18,0	5,4	8	135	55
440.11SR	11	26,5	21,0	6,0	9	150	55
440.12SR	12	26,5	21,0	6,0	9	150	75
440.13SR	13	30,0	23,0	6,6	10	175	75
440.14SR	14	30,0	23,0	6,6	10	175	120
440.15SR	15	35,0	27,0	7,6	11	195	125
440.16SR	16	35,0	27,0	7,6	11,0	195	155
440.17SR	17	35,0	27,0	7,6	11,0	195	155
440.18SR	18	39,0	31,0	8,0	12,0	215	210
440.19SR	19	39,0	31,0	8,0	12,0	215	210
440.20SR	20	45,0	34,0	9,5	13,5	230	225
440.21SR	21	45,0	34,0	9,5	13,5	230	225
440.22SR	22	46,0	36,0	9,4	14,0	245	250
440.23SR	23	49,0	38,0	9,4	15,2	265	250
440.24SR	24	49,0	38,0	10,0	15,2	265	260
440.25SR	25	49,0	38,0	9,4	15,2	265	260
440.26SR	26	56,0	42,0	10,0	17,0	290	420
440.27SR	27	56,0	42,0	11,4	17,0	290	420
440.30SR	30	61,0	49,0	13,0	20,0	320	560

	A [mm]	B [mm]	B1 [mm]	E [mm]	E1 [mm]	L [mm]	[g]
440.32SR	32	65,0	52,0	14,0	21,0	340	670
440.34SR	34	72,0	55,0	15,0	21,0	360	850
440.35SR	35	72,0	55,0	15,0	21,0	360	890
440.36SR	36	72,0	55,0	15,0	21,0	360	890
440.38SR	38	82,0	64,0	15,0	21,0	430	1440
440.41SR	41	82,0	64,0	15,0	21,0	430	1440
440.46SR	46	90,0	70,0	16,0	22,0	480	1890
440.50SR	50	98,0	77,0	17,0	23,0	520	2220
440.55SR	55	108,0	83,0	18,0	23,0	560	2780
440.60SR	60	115,0	89,0	20,0	25,0	595	3230
440.65SR	65	125,0	95,0	21,0	27,0	595	3680
440.70SR	70	142,0	112,0	24,0	29,0	630	4770