

S.H - NASADKI 1/2" 6-KĄTNE CALOWE




Norme :

ASME B107.1


Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.

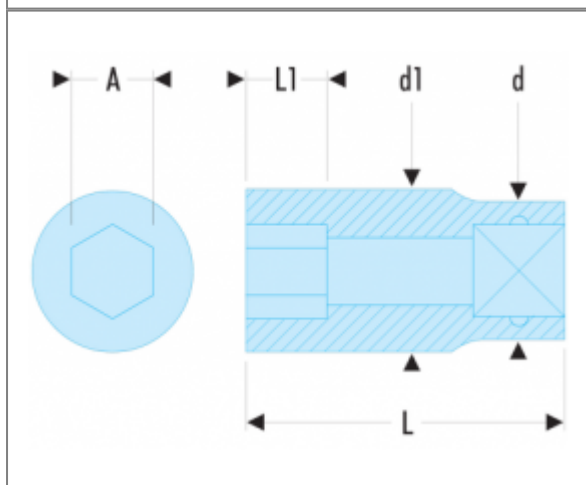

Referencje :

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6-kątny [mm]	[g]
S.3/8H	3/8	22,8	14,7	36	7,8	6	48
S.7/16H	7/16	22,8	16,5	36	9,0	6	51
S.1/2H	1/2	22,8	18,9	36	10,4	6	55
S.9/16H	9/16	22,8	20,2	36	10,5	6	58
S.19/32H	19/32	22,8	21,4	36	12,0	6	60
S.5/8H	5/8	21,6	22,6	36	12,0	6	65
S.21/32H	21/32	23,1	24,1	36	13,0	6	65
S.11/16H	11/16	22,6	24,6	36	13,0	6	71
S.3/4H	3/4	25,0	27,0	36	14,0	6	68
S.25/32H	25/32	25,9	27,9	36	14,0	6	72
S.13/16H	13/16	24,6	28,6	38	16,0	6	96
S.7/8H	7/8	26,4	30,4	38	16,5	6	99
S.15/16H	15/16	28,7	32,7	38	16,5	6	132
S.31/32H	31/32	27,7	34,1	38	16,5	6	142
S.1'H	1	28,3	34,7	38	16,5	6	152

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6-kątny [mm]	[g]
S.1'1/16H	1 1/16	29,2	36,6	44	19,0	6	164
S.1'1/8H	1 1/8	31,3	38,7	44	20,0	6	182
S.1'3/16H	1 3/16	33,0	40,4	44	20,0	6	201
S.1'1/4H	1 1/4	35,1	42,5	44	20,0	6	229