

Klucze do rur


131A - Model „Stillson”



- Zakres: 0 do 102 mm; 0 do 3 1/2".
- Klucz bardzo mocny, uzębienie hartowane na 55 HRC.
- Dokładne dokręcanie dzięki starannej obróbce wykańczającej gwintów i ślimaka, dobry chwyt w rękę.

	A maks. [mm]	A maks. ["]	B [mm]	E [mm]	L [mm]	L ["]	ΔΔ [kg]
131A.8	27	3/4	19,5	12,5	200	8	0,280
131A.10	34	1	25,0	16,0	250	10	0,600
131A.14	49	1 1/2	29,5	21,0	350	14	1,060
131A.18	60	2	32,0	24,0	450	18	1,800
131A.24	76	2"	41,5	27,5	600	24	3,000
131A.36	102	3 1/2	49,5	30,5	900	36	6,000

134A - Model wzmocniony żeliwny

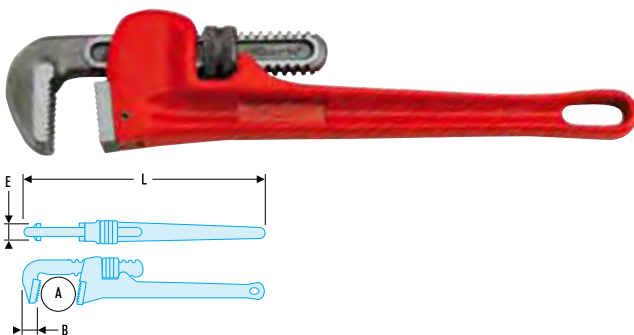

- Zakres: 0 do 140 mm; 0" do 5".
- Korpus żeliwny.
- Szczęka stała, wymiennalna, hartowana na 55 HRC.
- Szczęka ruchoma ze stali kutej.

	A maks. [mm]	A maks. ["]	B [mm]	E [mm]	L [mm]	L ["]	ΔΔ [kg]
134A.8	35	1	15	14,5	200	8	0,400
134A.10	54	1 1/2	20	17,5	250	10	0,780
134A.14	60	2	26	21,5	350	14	1,500
134A.18	76	2 1/2	29	26,0	450	18	2,400
134A.24	102	3 1/2	35	29,5	610	24	4,000
134A.36	140	5	35,5	43,0	920	36	9,000


135A - Model z główką pod kątem 90 stopni ze stopów lekkich



- Zakres: 0 do 76 mm; 0 do 2 1/2".
- Korpus z lekkiego stopu.
- Szczęki kute ze stali hartowanej na 55 HRC.

	A maks. [mm]	A maks. ["]	E [mm]	L [mm]	L ["]	ΔΔ [kg]
135A.14	49	1 1/2	34	350	14	0,940
135A.18	60	2	39	450	18	1,480
135A.24	76	2 1/2	47	600	24	2,450

133A - Model ze stopu lekkiego

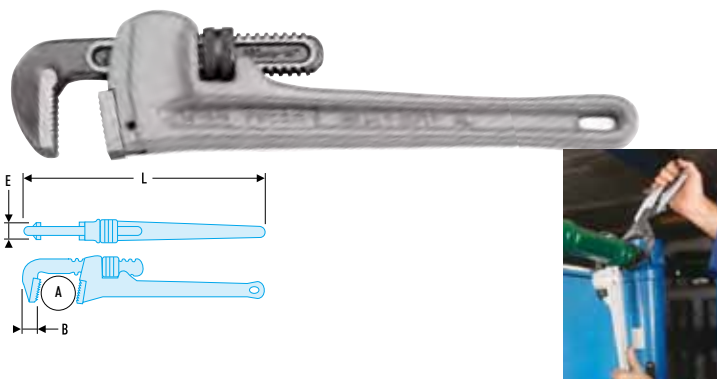

- Zakres: 0 do 140 mm; 0" do 5".
- Cechy charakterystyczne takie same, jak w modelu 134A.

	A maks. [mm]	A maks. ["]	B [mm]	E [mm]	L [mm]	L ["]	ΔΔ [kg]
133A.14	60	2	26	21,5	350	14	1,000
133A.18	76	2 1/2	30	26,0	450	18	1,560
133A.24	90	3	34	29,5	600	24	2,460
133A.36	140	5	44	32,0	900	36	5,180