



## S.SR - NASADKI 1/2" 12-KĄTNE METRYCZNE ADF

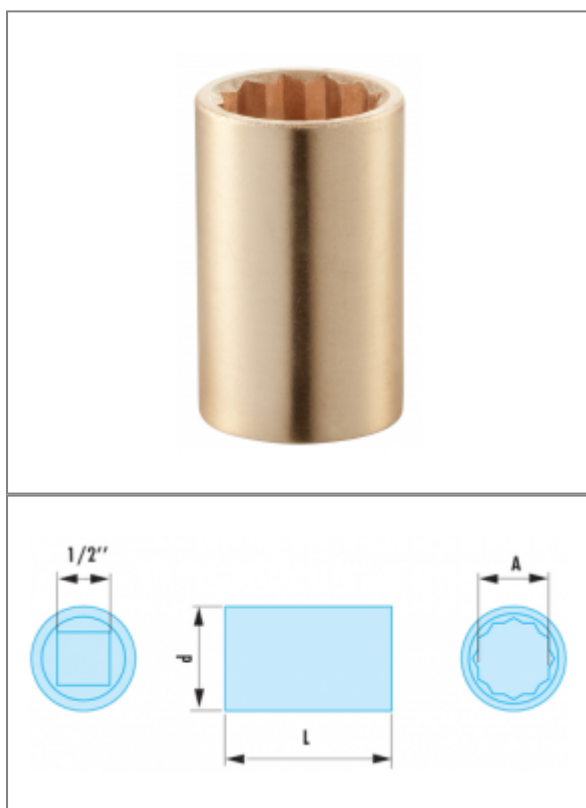


### Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

### Referencje :

	A [mm]	d maks. [mm]	L [mm]	[g]
<b>S.6SR</b>	6	24	40	75
<b>S.7SR</b>	7	24	40	80
<b>S.8SR</b>	8	24	40	80
<b>S.9SR</b>	9	24	40	80
<b>S.10SR</b>	10	24	40	80
<b>S.11SR</b>	11	24	40	80
<b>S.12SR</b>	12	24	40	80
<b>S.13SR</b>	13	24	40	80
<b>S.14SR</b>	14	24	40	80
<b>S.15SR</b>	15	25	40	85
<b>S.16SR</b>	16	25	40	85
<b>S.17SR</b>	17	25	40	90
<b>S.18SR</b>	18	26	42	90
<b>S.19SR</b>	19	28	42	110
<b>S.20SR</b>	20	29	42	120
<b>S.21SR</b>	21	30	43	140
<b>S.22SR</b>	22	31	43	145
<b>S.23SR</b>	23	33	43	160
<b>S.24SR</b>	24	34	43	185

	A [mm]	d maks. [mm]	L [mm]	[g]
<b>S.25SR</b>	25	36	43	200
<b>S.26SR</b>	26	37	43	210
<b>S.27SR</b>	27	38	46	235
<b>S.28SR</b>	28	39	46	245
<b>S.29SR</b>	29	41	46	250
<b>S.30SR</b>	30	42	46	285
<b>S.32SR</b>	32	44	46	320