


82H.SR - KLUCZE TRZPIENIOWE METRYCZNE ADF

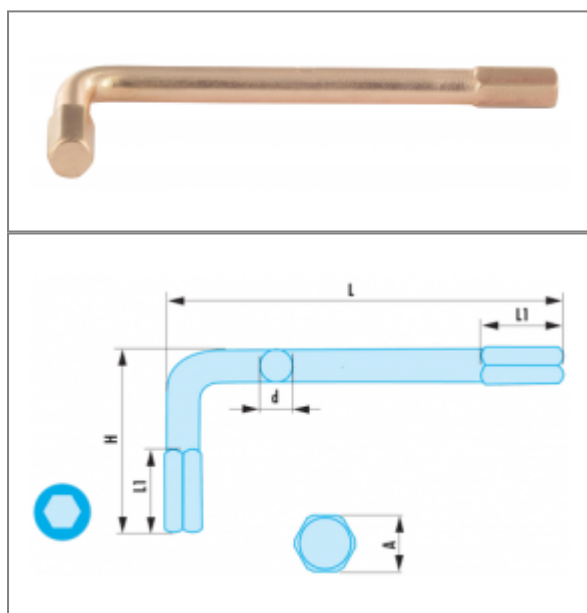


Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	A [mm]	d [mm]	H [mm]	L [mm]	L1 [mm]	[g]
82H.1.5SR	1,5	3,0	13	38	5	5
82H.2SR	2,0	3,0	13	38	5	5
82H.3SR	3,0	3,7	25	59	7	10
82H.4SR	4,0	3,8	30	65	10	10
82H.5SR	5,0	4,5	32	79	10	15
82H.6SR	6,0	5,5	37	85	15	25
82H.7SR	7,0	6,0	43	88	20	35
82H.8SR	8,0	7,0	44	92	20	50
82H.9SR	9,0	8,0	44	97	20	60
82H.10SR	10,0	9,0	45	110	20	80
82H.11SR	11,0	10,0	48	119	20	100
82H.12SR	12,0	11,0	52	130	20	145
82H.13SR	13,0	11,5	54	140	20	180
82H.14SR	14,0	12,0	58	150	25	210
82H.16SR	16,0	14,0	63	162	25	300
82H.17SR	17,0	15,0	65	168	30	370
82H.18SR	18,0	16,0	69	173	30	450
82H.19SR	19,0	17,0	72	177	30	490
82H.22SR	22,0	20,0	77	186	35	675
82H.23SR	23,0	21,0	79	189	35	725
82H.24SR	24,0	22,0	82	192	35	825
82H.27SR	27,0	25,0	93	213	35	1220
82H.32SR	32,0	30,0	116	266	40	2065

	A [mm]	d [mm]	H [mm]	L [mm]	L1 [mm]	[g]
82H.36SR	36,0	34,0	128	294	40	2905
82H.41SR	41,0	39,0	140	320	40	4120