
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI

e > Lighting > Area lighting

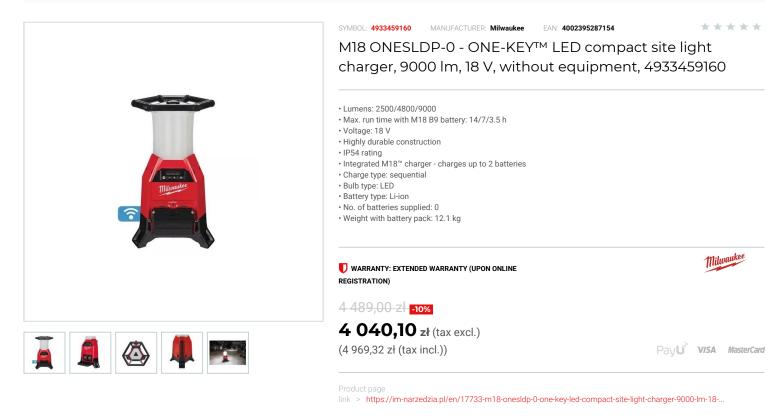

DESCRIPTION

Optimise brightness and run time by adjusting the light output from 0 - 9000 Lumens.

- ONE-KEY™ tool customisation allows user to control brightness and set light settings remotely.
 ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention.
- Program automatic schedules to decide during which days/times the light is running.
 Dual power source, powered by either M18[™] REDLITHIUM[™]-ION battery packs or use of 2.5 m hardwired cord.

- AC outlet gives the possibility to string multiple lights together.
 Highly durable and impact resistant polycarbonate lens to protect the light from rough jobsite conditions.
- IP54 rating in battery mode light is protected from dust and splashing water.
 TRUEVIEW[™] high definition light output delivers consistent beam, optimised colour temperature and true representation of colours and detail.
- Securable battery door helps to protect batteries from theft (lock not included).
- Flexible battery system: works with all MILWAUKEE® M18[™] batteries.

Supplied without battery.

FEATURES

Symbol	M180NESLDP-0
Nazwa	lampa strefowa LED
Waga [kg]	12.10
Stopień ochrony IP	IP 54
Jasność	2500/4800/9000 lm

26-11-2024