
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI

e > Power tools > Batteries and chargers > Batteries

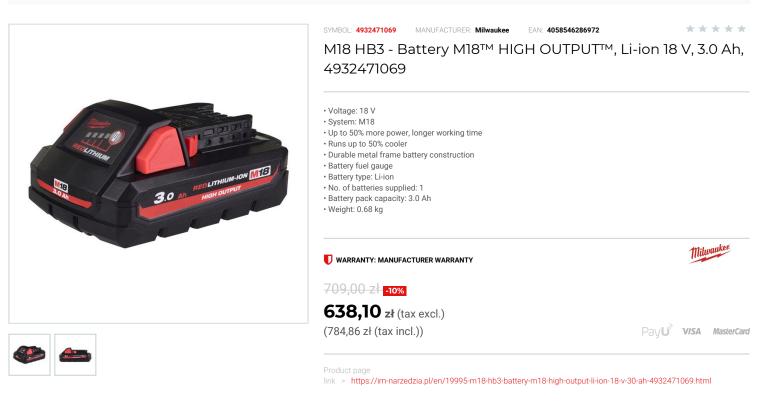

## DESCRIPTION

Charge time

- Fast charger M12-18 FC: 35 min
- Standard charger M12-180: 65 min / M12-18 AC: 75 min / M1418 C6: 70 min
   The new M18<sup>®</sup> 12.0 Ah HIGH OUTPUT<sup>®</sup> battery pack provides up to 50% more power vs M18<sup>®</sup> REDLITHIUM<sup>®</sup>-ION battery packs.
- Patented REDLINK<sup>™</sup> intelligence protects the pack from tough jobsite conditions to ensure optimum performance.
   Runs up to 50% cooler than other M18<sup>™</sup> REDLITHIUM<sup>™</sup>-ION battery packs through heavy applications, allowing tradesmen to push their cordless tools harder and longer than ever before.
- Drives complete corded replacement on the job site with more run time than ever before.
  Durable metal frame battery construction with shock responsive separators prevents pack failure from excessive vibrations or drops.
- On-board battery fuel gauge helps the user to maximise battery run-time efficiency.
- Individual cell monitoring ensures optimal charge and discharge for maximum life.
   Compatible with all M18<sup>™</sup> tools in the range.

## FEATURES

21-11-2024

Symbol	M18HB3
Napięcie akumulatora [V]	18
Pojemność akumulatora [Ah]	3.0
System	M18™
Typ akumulatora	Li-Ion