
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI

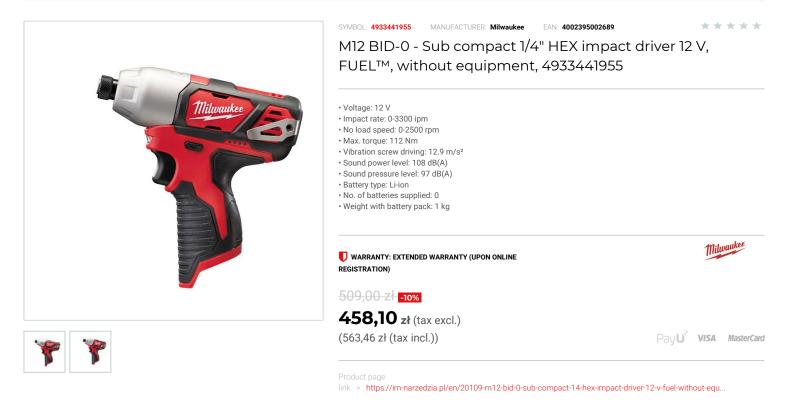

## DESCRIPTION

High performance sub compact impact driver measures 165 mm in length making it ideal for working within confined spaces

REDLINK<sup>®</sup> overload protection electronics in tool and battery pack deliver best in class system durability.
 Heavy duty full metal gearbox and gears for superior durability and maximum torque.

- 1/4" Hex chuck for quick and easy bit change.Optimised handle for better control and improved grip.
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability.
  On board fuel gauge and LED light added user convenience and illumination in low lit working conditions.
- REDLITHIUM\*\*-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life.

Flexible battery system: works with all MILWAUKEE® M12<sup>™</sup> batteries.

Supplied without battery and charger.

## FEATURES

Symbol	M12BID-0
Wyjście	1/4"
Nm max	112
Częstość udaru [ud/min]	0-3300
Ilość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	12
Obroty [obr/min]	0-2500