
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI

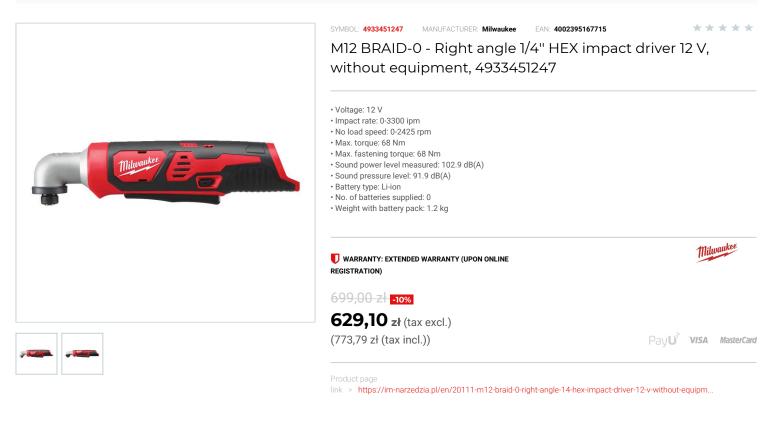

## DESCRIPTION

- Compact right angle impact driver measures 287 mm in length making it ideal for working within confined spaces.
- REDLINK<sup>™</sup> overload protection electronics delivers best in class system durability • Full metal gearbox and gears for superior durability and maximum torque of 68 Nm.
- Compact head design with diameter of 35.6 mm.
  Multi-handle design for multiple hand positions and maximum comfort.
- 1/4" Hex chuck for quick easy one handed bit change.
  Individual battery cell monitoring optimises tool run time and ensures long term pack durability.
- On board fuel gauge and LED light.
- REDLITHUM<sup>®-I</sup>ON battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life.
  Flexible battery system: works with all MILWAUKEE® M12<sup>®</sup> batteries.

· Supplied without battery and charger.

## FEATURES

10-04-2025

Symbol	M12BRAID-0
Wyjście	1/4"
Nm max	68
Częstość udaru [ud/min]	0-3300
llość akumulatorów	brak
Zasilanie	battery
Napięcie akumulatora [V]	12
Obroty [obr/min]	0-2425