


> Cutting, drilling, abrasion > Drill bits > Wood drill bits

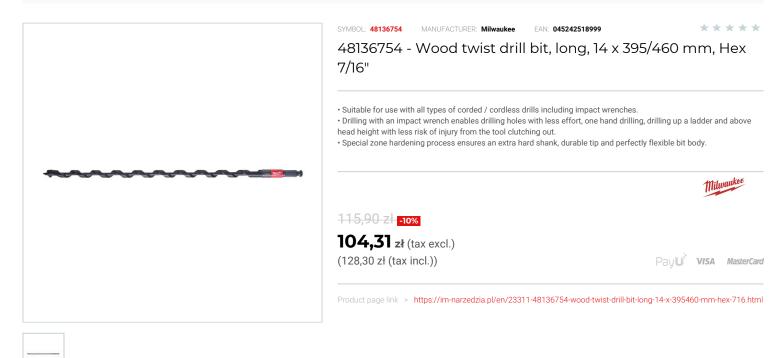

DESCRIPTION

- New MILWAUKE® Through-Center head geometry with the lead cutting edge lines up with the center of the feed screw this ensures efficient chip removal and allows for continuous feeding.
- · 20° rake angle of the lead cutting edge creates a path for easy chip ejection
- Polished and powder coated flute design produces a non-stick surface for increased chip ejection, reduced chip clogging and higher selfeeding capability.
- Milling marks are removed in the finishing process, creating a smooth surface
 Lewis flute with large, wide throat design for rapid chip removal.
- · Sharp ground cutting lips for smooth clean holes.
- Resharpenable cutting lips.
- With " shank to fit square drive 1/2" impact wrenches the adaptor 48660061 is required.
- Suitable for hard & soft wood, wet & treated wood, plywood, chipboard, WPC (wood plastic composite), laminated beams and panels, exotic and hard woods e.g. bongossi, iroko, teak, beech, oak, etc.

FEATURES

Symbol	48136754
L [mm]	460.00
D	14.00
Тур	kręte
Ilość elementów	1
Długość robocza	395.00
Uchwyt	Hex