
PARTNER W DOBORZE ROZWIĄZAŃ TECHNICZNYCH DLA PRZEMYSŁU I MOTORYZACJI



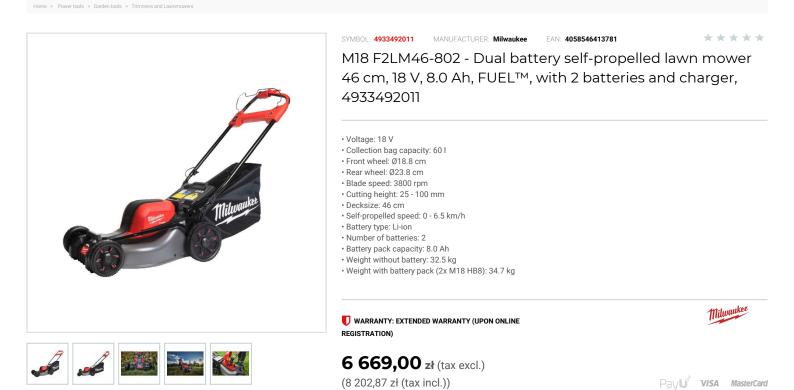

link > https://im-narzedzia.pl/en/31860-m18-f2lm46-802-dual-battery-self-propelled-lawn-mower-46-cm-18-v..

DESCRIPTION

- Vibration level: 0.48 m/s²
- Vibration ucertainty: 1.5 m/s²
 Sound pressure level (LPA): 80.9 dB(A)
- 46 cm steel deck and blade design paired with M18 FUEL™ technology deliver best-in-class quality of cut.
- Compact deck design for more maneuverability in tight access areas.
 3-in-1 grass management system to mulch,bag, or rear side discharge.
- High Lift Mode allows to togle between continuous outstanding pek power for best cut quality and automatic blade speed adjustment to the required power for more efficiency.
 Adjustable self-propelled mechanism with 5 speed settings delivers up to 6.5 km/h cutting speed.
- Active speed management paddle delivers ultimate user control.
- Runs on 2 x 18V batteries for outstanding power and performance.
 Cuts areas up to 1,600 m² on a single charge of two M18[™] HIGH OUTPUT[™] 8.0 Ah battery packs in combination with the self-propelled mode
- 7-position, single point cutting height adjustment from 2.5 10 cm to cover a range of grass types.
- Folding handles and upright storage for easy and compact transportation.
 The HIGH OUTPUT™ system of tools elevates the M18 FUEL[™] technologies to a new level and delivers extended performance and extended run time.
- These tools are designed to maximise the partnership with HIGH OUTPUT™ batteries.
- Flexible battery system: works with all MILWAUKEE® M18[™] batteries.
 Standard Equipment: Mulch plug, 60 litre bag, rear side discharge chu
- . ent: Mulch plug, 60 litre bag, rear side discharge chute.

· Supplied with 2 batteries and charger.

FFATURES

Symbol	M18F2LM46-802
llość akumulatorów	2
Zasilanie	battery
Napięcie akumulatora [V]	18
Typ akumulatora	Li-lon