


50.SR - KLUCZE OCZKOWE DO POBIJANIA METRYCZNE ADF

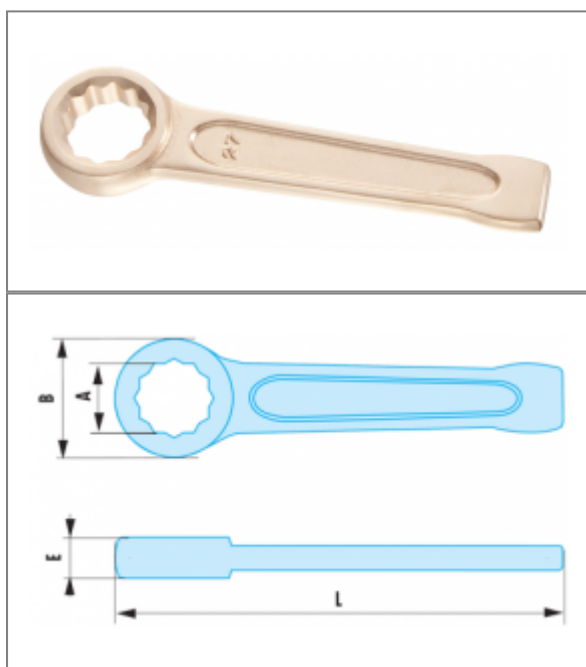


Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	A [mm]	B [mm]	E [mm]	L [mm]	[g]
50.17SR	17	32	12,0	145	210
50.19SR	19	32	12,0	145	200
50.22SR	22	42	14,0	165	245
50.24SR	24	42	14,0	165	235
50.27SR	27	46	16,0	175	350
50.30SR	30	53	16,0	185	475
50.32SR	32	53	16,0	185	465
50.34SR	34	58	19,0	205	580
50.36SR	36	58	19,0	205	580
50.38SR	38	64	20,0	225	790
50.41SR	41	64	20,0	225	755
50.46SR	46	73	22,0	235	990
50.50SR	50	78	23,0	250	1145
50.55SR	55	86	23,5	265	1440
50.60SR	60	92	25,5	274	1620
50.65SR	65	102	28,0	298	1995
50.70SR	70	108	31,5	320	2435
50.75SR	75	113	33,0	326	3010
50.80SR	80	124	34,0	350	3600
50.85SR	85	130	36,0	355	4330
50.90SR	90	142	39,0	390	5500
50.95SR	95	142	39,0	390	5450

	A [mm]	B [mm]	E [mm]	L [mm]	[g]
50.100SR	100	155	43,0	420	7080
50.105SR	105	155	43,0	420	7000
50.110SR	110	168	45,0	450	9130
50.120SR	120	182	50,0	480	11000
50.130SR	130	200	57,0	520	12610
50.140SR	140	200	57,0	520	13000
50.150SR	150	220	58,0	565	14500