


50.SR - KLUCZE OCZKOWE DO POBIJANIA CALOWE ADF

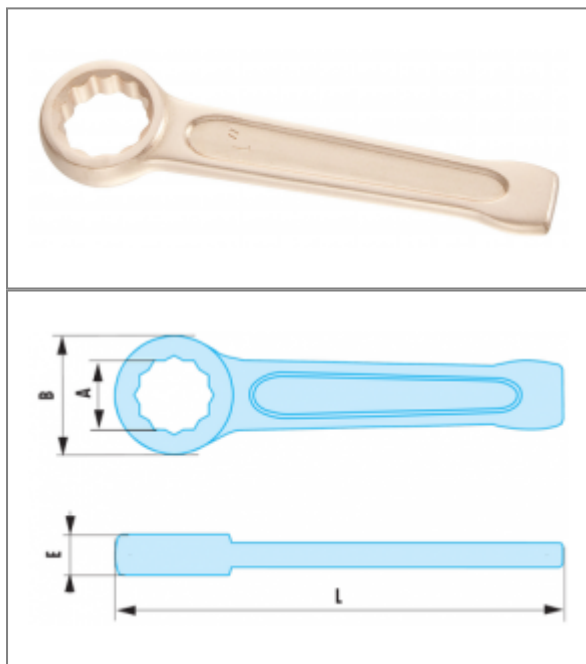

Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	A ["]	B [mm]	E [mm]	L [mm]	[g]
50.11/16SR	11/16"	32	12,0	145	210
50.3/4SR	3/4"	32	12,0	145	200
50.7/8SR	7/8"	42	14,0	165	245
50.1PSR	1"	46	16,0	175	350
50.1P1/16SR	1-1/16"	46	16,0	175	350
50.1P1/8SR	1-1/8"	53	16,0	185	455
50.1P3/16SR	1-3/16"	53	16,0	185	475
50.1P1/4SR	1-1/4"	53	16,0	185	470
50.1P3/8SR	1-3/8"	58	19,0	205	560
50.1P1/2SR	1-1/2"	64	28,0	225	790
50.1P5/8SR	1-5/8"	64	28,0	225	755
50.1P3/4SR	1-3/4"	73	22,0	235	1020
50.1P13/16SR	1-13/16"	73	22,0	235	990
50.2PSR	2"	78	23,0	250	1145
50.2P1/16SR	2-1/16"	86	23,5	265	1145
50.2P3/16SR	2-3/16"	86	23,5	265	1350
50.2P13/64SR	2-13/64"	86	23,5	265	1350
50.2P5/16SR	2-5/16"	92	25,5	274	1620
50.2P3/8SR	2-3/8"	92	25,5	274	1620
50.2P1/2SR	2-1/2"	102	30,0	298	1900
50.2P9/16SR	2-9/16"	102	30,0	298	1900
50.2P5/8SR	2-5/8"	102	30,0	298	1900

	A ["]	B [mm]	E [mm]	L [mm]	[g]
50.2P3/4SR	2-3/4"	108	31,5	320	2270
50.2P15/16SR	2-15/16"	113	33,0	326	2680
50.3PSR	3"	113	33,0	326	2680
50.3P1/16SR	3-1/16"	124	34,0	350	2820
50.3P1/8SR	3-1/8"	124	34,0	350	2820
50.3P3/8SR	3-3/8"	130	36,0	355	4000
50.3P9/16SR	3-9/16"	142	39,0	390	5300
50.3P3/4SR	3-3/4"	142	39,0	390	5300
50.3P15/16SR	3-15/16"	155	43,0	420	6730
50.4P1/8SR	4-1/8"	155	43,0	420	6730