

R.E - NASADKI 1/4" 12-KĄTNE METRYCZNE




Norme :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5

Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.

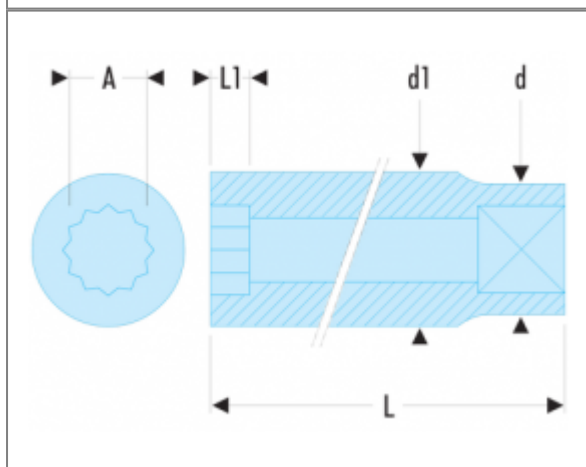

Referencje :

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
R.5,5E	5,5	11,2	8,8	22	4,80	12	8,40
R.6E	6,0	11,2	9,4	22	5,60	12	8,60
R.7E	7,0	11,0	11,0	22	6,00	12	9,20
R.8E	8,0	12,0	12,0	22	6,50	12	11,50
R.9E	9,0	13,2	13,2	22	6,50	12	14,30
R.10E	10,0	14,7	14,7	22	7,80	12	17,70
R.11E	11,0	15,8	15,8	22	9,00	12	19,40
R.12E	12,0	17,0	17,0	22	9,50	12	23,20
R.13E	13,0	17,7	17,7	22	10,00	12	23,70
R.14E	14,0	18,7	18,7	22	10,00	12	26,10