

JB - NASADKI 3/8" 12-KĄTNE CAŁOWE CIENKOŚCIENNE




Norme :

ASME B107.1

Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Zgodne z normami lotniczymi.
- Wykończenie: chromowane błyszczące.

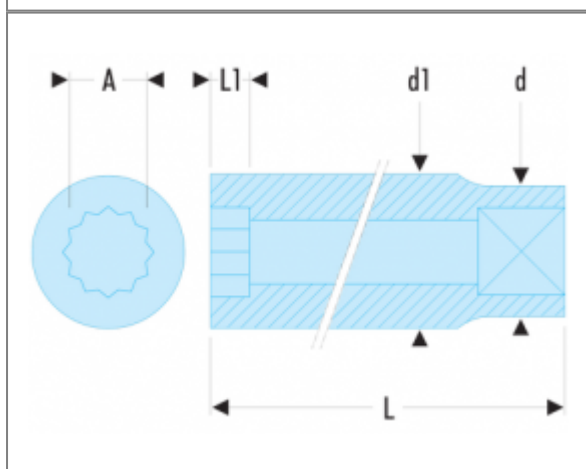

Referencje :

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
JB.1/4	1/4	16,7	9,7	27	6,0	12	20
JB.5/16	5/16	16,7	11,7	27	6,8	12	21
JB.11/32	11/32	16,7	12,7	27	6,8	12	22
JB.3/8	3/8	16,7	13,7	27	7,5	12	23
JB.7/16	7/16	16,7	15,6	27	9,0	12	24
JB.1/2	1/2	16,7	17,6	30	10,4	12	27
JB.9/16	9/16	18,5	19,6	30	10,5	12	33
JB.5/8	5/8	20,0	21,6	30	12,0	12	42
JB.11/16	11/16	22,0	23,6	32	13,0	12	50
JB.3/4	3/4	22,8	25,4	32	15,0	12	55
JB.13/16	13/16	24,0	27,4	32	16,0	12	68
JB.7/8	7/8	24,0	29,4	32	16,0	12	68