

S - NASADKI 1/2" 12-KĄTNE CALOWE




Norme :

ASME B107.1

Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.
- Dostępne w zestawie na stojaku metalowym: Symbol S.40U (3/8" --> 21/32") i symbol S.41U (11/16" --> 1").

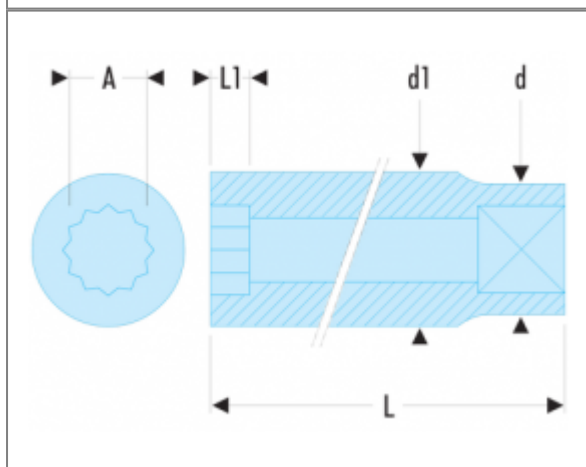

Referencje :

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
S.3/8	3/8	22,8	14,7	36	7,8	12	48
S.7/16	7/16	22,8	16,5	36	9,0	12	51
S.1/2	1/2	22,8	18,9	36	10,4	12	55
S.9/16	9/16	22,8	20,2	36	10,5	12	58
S.19/32	19/32	22,8	21,4	36	12,0	12	60
S.5/8	5/8	21,6	22,6	36	12,0	12	65
S.21/32	21/32	23,1	24,1	36	13,0	12	65
S.11/16	11/16	22,6	24,6	36	13,0	12	71
S.3/4	3/4	25,0	27,0	36	14,0	12	68
S.25/32	25/32	25,9	27,9	36	14,0	12	72
S.13/16	13/16	24,6	28,6	38	16,0	12	96
S.7/8	7/8	26,4	30,4	38	16,5	12	99
S.15/16	15/16	28,7	32,7	38	16,5	12	132
S.31/32	31/32	27,7	34,1	38	16,5	12	131
S.1'	1	28,3	34,7	38	16,5	12	141
S.1'1/16	1 1/16	29,2	36,6	44	19,0	12	147

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
S.1'1/8	1 1/8	31,3	38,7	44	20,0	12	170
S.1'3/16	1 3/16	33,0	40,4	44	20,0	12	185
S.1'1/4	1 1/4	35,1	42,5	44	20,0	12	201