

## NS.A - NASADKI UDAROWE 1/2" 6-KĄTNE METRYCZNE




### Norm :

**NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33**

### Opis :

- Dla Państwa bezpieczeństwa należy zawsze używać nasadek uderowych z odpowiednimi pierścieniami i kołkami zabezpieczającymi.

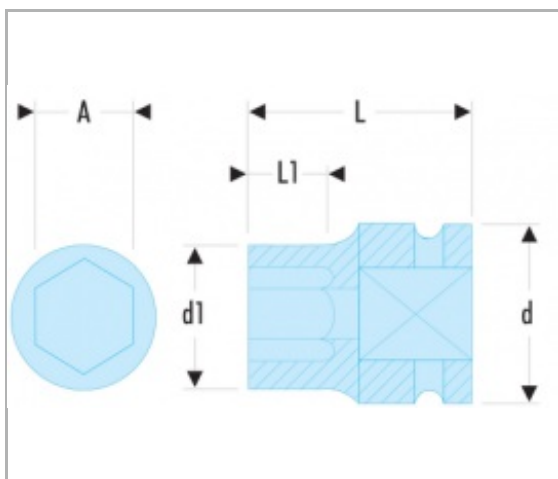

### Referencje :

|  | A [mm] | d [mm] | d1 [mm] | L [mm] | L1 [mm] | [g] |
|-------------------------------------------------------------------------------------|--------|--------|---------|--------|---------|-----|
| <b><u>NS.8A</u></b>                                                                 | 8      | 25     | 15,0    | 38     | 9       | 70  |
| <b><u>NS.9A</u></b>                                                                 | 9      | 25     | 16,0    | 38     | 12      | 70  |
| <b><u>NS.10A</u></b>                                                                | 10     | 25     | 17,5    | 38     | 12      | 75  |
| <b><u>NS.11A</u></b>                                                                | 11     | 25     | 18,7    | 38     | 12      | 76  |
| <b><u>NS.12A</u></b>                                                                | 12     | 25     | 20,0    | 38     | 12      | 75  |
| <b><u>NS.13A</u></b>                                                                | 13     | 25     | 21,0    | 38     | 12      | 76  |
| <b><u>NS.14A</u></b>                                                                | 14     | 25     | 22,5    | 38     | 12      | 83  |
| <b><u>NS.15A</u></b>                                                                | 15     | 30     | 23,7    | 38     | 12      | 112 |
| <b><u>NS.16A</u></b>                                                                | 16     | 30     | 25,0    | 38     | 12      | 105 |

|                      |    |    |      |    |    |     |
|----------------------|----|----|------|----|----|-----|
| <b><u>NS.17A</u></b> | 17 | 30 | 26,5 | 38 | 13 | 112 |
| <b><u>NS.18A</u></b> | 18 | 30 | 27,5 | 38 | 13 | 110 |
| <b><u>NS.19A</u></b> | 19 | 30 | 29,0 | 38 | 14 | 112 |
| <b><u>NS.20A</u></b> | 20 | 30 | 30,0 | 38 | 15 | 116 |
| <b><u>NS.21A</u></b> | 21 | 30 | 31,0 | 38 | 15 | 156 |
| <b><u>NS.22A</u></b> | 22 | 30 | 32,5 | 38 | 16 | 156 |
| <b><u>NS.23A</u></b> | 23 | 30 | 33,5 | 38 | 16 | 156 |
| <b><u>NS.24A</u></b> | 24 | 30 | 35,0 | 45 | 20 | 169 |
| <b><u>NS.26A</u></b> | 26 | 30 | 38,0 | 50 | 24 | 192 |
| <b><u>NS.27A</u></b> | 27 | 30 | 39,0 | 50 | 24 | 220 |
| <b><u>NS.28A</u></b> | 28 | 30 | 40,0 | 50 | 24 | 273 |
| <b><u>NS.29A</u></b> | 29 | 30 | 41,0 | 50 | 24 | 276 |
| <b><u>NS.30A</u></b> | 30 | 30 | 43,0 | 50 | 24 | 285 |
| <b><u>NS.32A</u></b> | 32 | 30 | 45,0 | 50 | 24 | 278 |