

NK.A - NASADKI UDAROWE 3/4" 6-KĄTNE METRYCZNE



Norm :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Opis :

- Dla Państwa bezpieczeństwa należy zawsze używać nasadek uderowych z odpowiednimi pierścieniami i kołkami zabezpieczającymi.

d [mm] :

44

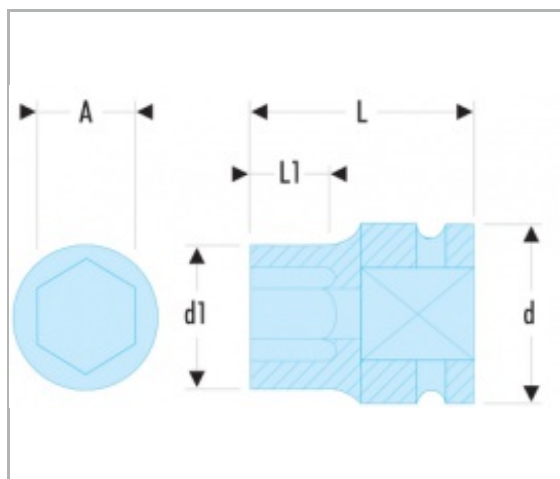

Referencje :

	A [mm]	d1 [mm]	L [mm]	L1 [mm]	[g]
<u>NK.17A</u>	17	30	52	12	300
<u>NK.18A</u>	18	32	50	13	310
<u>NK.19A</u>	19	33	50	14	315
<u>NK.21A</u>	21	35	50	15	330
<u>NK.22A</u>	22	37	50	16	345
<u>NK.23A</u>	23	38	50	16	350
<u>NK.24A</u>	24	39	50	17	350
<u>NK.26A</u>	26	42	50	18	480
<u>NK.27A</u>	27	43	54	23	480

<u>NK.28A</u>	28	44	54	23	520
<u>NK.29A</u>	29	45	54	23	520
<u>NK.30A</u>	30	47	54	23	545
<u>NK.32A</u>	32	49	56	23	620
<u>NK.33A</u>	33	51	56	23	650
<u>NK.34A</u>	34	52	56	23	680
<u>NK.35A</u>	35	53	56	23	680
<u>NK.36A</u>	36	54	56	25	705
<u>NK.38A</u>	38	57	58	26	890
<u>NK.41A</u>	41	60	58	28	890
<u>NK.42A</u>	42	62	58	29	925
<u>NK.46A</u>	46	67	63	32	1055