


49.SR - KLUCZE PŁASKIE DO POBIJANIA METRYCZNE ADF

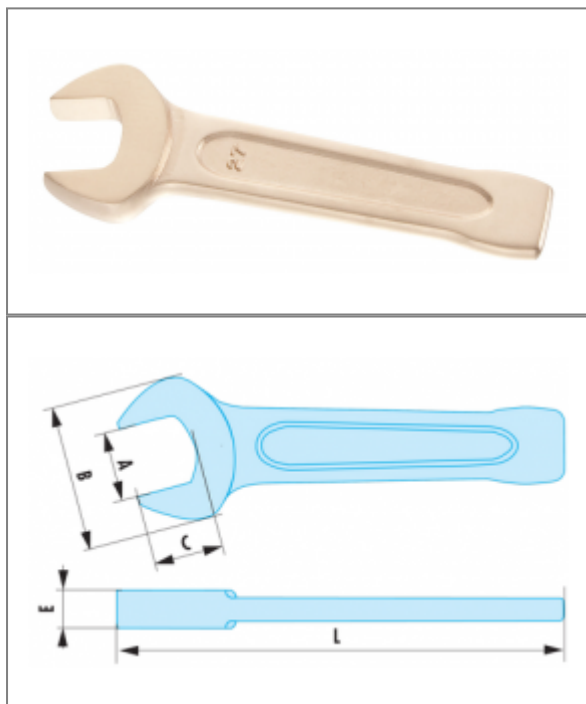

Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	A [mm]	B [mm]	C [mm]	E [mm]	L [mm]	[g]
49.17SR	17	40,5	19	11,0	125	150
49.19SR	19	40,5	19	11,0	125	150
49.22SR	22	46,0	22	12,0	135	195
49.24SR	24	50,0	24	12,0	150	245
49.27SR	27	57,0	27	15,0	175	335
49.30SR	30	64,0	30	16,0	190	435
49.32SR	32	66,0	32	16,0	190	515
49.36SR	36	75,0	36	18,0	210	725
49.38SR	38	82,0	38	18,0	220	955
49.41SR	41	87,0	41	18,5	230	955
49.46SR	46	98,0	46	20,0	250	1225
49.50SR	50	108,0	50	20,5	275	1340
49.52SR	52	108,0	52	20,5	275	1500
49.55SR	55	117,0	55	23,0	305	1665
49.60SR	60	128,0	60	23,5	315	2190
49.65SR	65	141,0	65	27,5	335	2670
49.70SR	70	156,0	70	28,5	370	3250
49.75SR	75	162,0	75	29,0	375	3660
49.80SR	80	174,0	80	32,0	400	4500
49.85SR	85	174,0	85	32,0	400	5290
49.90SR	90	194,0	90	36,0	445	6640

	A [mm]	B [mm]	C [mm]	E [mm]	L [mm]	[g]
49.95SR	95	194,0	95	36,0	445	6640
49.100SR	100	228,0	100	43,0	485	8850
49.110SR	110	238,0	110	45,0	513	11060
49.120SR	120	250,0	120	51,0	530	11060
49.130SR	130	265,0	130	53,0	560	14800
49.140SR	140	290,0	140	56,0	630	15850
49.150SR	150	290,0	150	56,0	630	15850